


# FIREFLY Titan

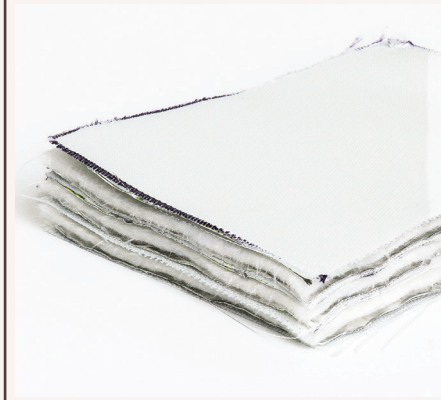

## Material Description

FIREFLY Titan is a lightweight and flexible fabric cavity fire barrier with an inner core of insulating fire protection. It provides good acoustic performance. Available in a 6m x 1.3m (7.8m<sup>2</sup>) roll, 15mm thick 3.9kg m<sup>2</sup>.

## Applications

Used to provide a seal of up to 6.3m high x infinite length, extending from the head of a compartment wall or sub-division wall to the underside of the roof lining. Primary fire stopping component of the Titan Spandrel System. It's flexibility and fire rating make it ideal for bespoke applications.

### Certification

Tested in accordance with AS1530.1 non combustibility.  
CSIRO Report FNC11220

AS1530.3 simultaneous determination of ignitability, flame propagation, heat release and smoke release.  
AWTA Report 20-002569

Tested and assessed in accordance with AS1530.4 2014 and AS4072.12005  
Warringtonfire Report FAS190287 RIR.

### FRL

Up to 60/60/60 when self supported and -/120/60 when fixed to a substrate. For subject FRL refer to referenced reports.