


Solution Spotlight


HVAC&R

One of our most trusted firestopping systems is now available across a variety of substrates – designed specifically with the demands of HVAC&R installations in mind.


Versatile substrate compatibility

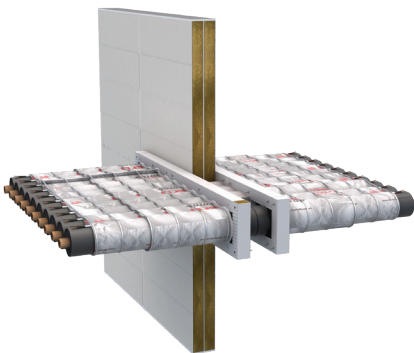

FIREFLYBatt | H138, V138

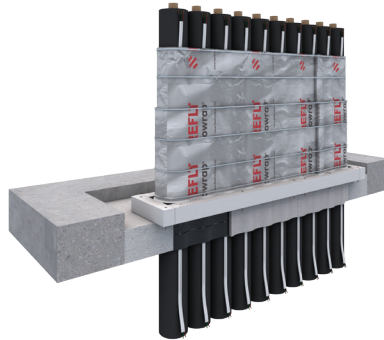

FIREFLYMortar | H52, H53

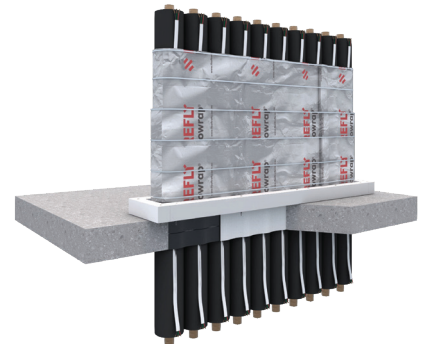

Directly within coreholes | V499, H236, H237

Seal multiple services with confidence

This system allows you to seal up to 10 copper pipes with nitrile lagging and up to 10 TPS cables using :


- FIREFLYBatt
- FIREFLYStrap
- FIREFLYMasticHP
- FIREFLYMastic
- FIREFLY Penowrap

Working in tight corners? We have the solutions.

These close-to-edge solutions are ideal for space-constrained applications when the system is up against a wall or a slab.



FAS190235 | H139

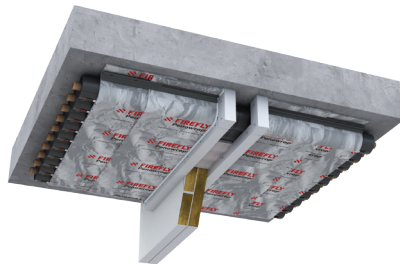

FAS190235 | V139



FAS230181 | H54

Can we do it this way?




One of the most frequently asked questions in the fire stopping industry – and we love saying YES.

Based on your feedback, we now offer concentric arrangements of the above systems within FIREFLYBatt and FIREFLYMortar.

And Here's the Game-Changer

We've expanded our capabilities:

- This solution now supports a range of pipe sizes – now up to DN32.
- For lagging thickness, we have got you covered from 13 mm to 38 mm.
- This system achieves the most commonly required FRL on the market: -/120/120.

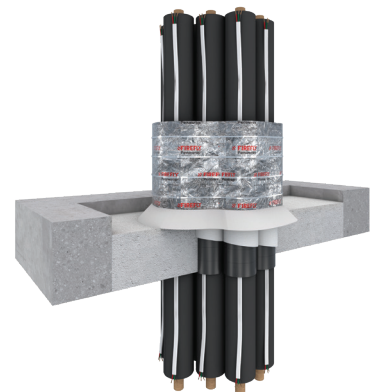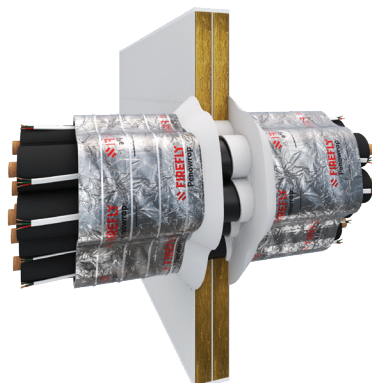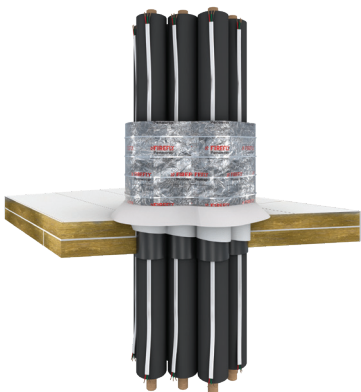

Contact your Client Account Manager to learn more about our range of fire stopping solutions for HVAC & R.